




Canless
Downlighting
p. 9-19



Surface Mount
Downlighting
p. 20-23



Recessed
LED Trims
p. 24-26



Housings &
Trims
p. 27-28



Under
Cabinets
p. 29



Smart Wi-Fi
Lighting
p. 30-31



HALO®

RECESSED LED DOWNLIGHTS

HALO is the industry leader in high-quality recessed downlighting, offering the widest selection of innovative and flexible solutions for your application needs.

HALO®

CANLESS DOWNLIGHTING

GO CANLESS! Installs Virtually Anywhere!


- Field-Selectable color temperatures
- Installs into drywall/suspended ceiling (no housing required)
- Remote driver/junction box included
- Rated for insulated and non-IC ceilings

**MORE
FLEXIBILITY!
SAVE TIME AND
MONEY!**




**NO HOUSING
NEEDED!**

Quick and Easy Installation



New Construction Mounting Frames CANLESS DOWNLIGHT

- Use HALO's canless mounting frames on your next new construction or remodeling project
- Toolless thumbscrews hold HALO canless remote driver/j-boxes to the mounting frame
- MF Series available in 4" and 6" rounds with 1/2" drywall collar
- HL Series available in 3", 4", 6", and 8" rounds and convert to squares with corner knockouts

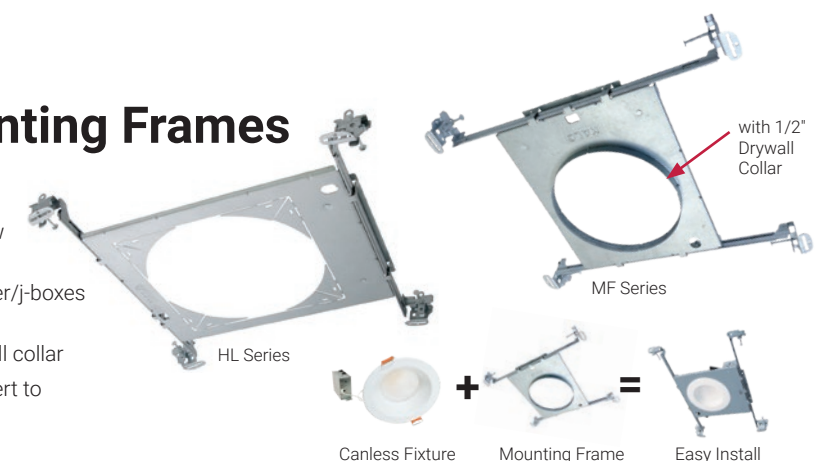

Catalog Number	Description	UPC
MF4RC	4" Round/Square Mounting Frame with 1/2" Collar	080083268009
MF6RC	6" Round/Square Mounting Frame with 1/2" Collar	080083268023
HL3RSMF	3" Round/Square Mounting Frame	080083876143
HL4RSMF	4" Round/Square Mounting Frame	080083876167
HL6RSMF	6" Round Mounting Frame	080083876181
HL8RSMF	8" Round Mounting Frame	080083890460

HALO SLIM CANLESS DOWNLIGHT PRODUCT SELECTION GUIDE

GoodBetterBest					
FEATURES/PERFORMANCE		HLBSL & HLBE	HLBPH	HLB	HLBC
	Slim 1/2" Thin	✓	✓	✓	✓ + 2-in-1 Install Option (Canless-to-Can)
	Size / Shape	4" & 6" Round	4", 6" Round	3", 4", 6", 8", 12" Round, Square	4", 6" Round
	Lens	Smooth	Smooth	Low-glare Prismatic	Low-glare Prismatic
	Max Lumens (By size @ 3000K)	745, 1,025	805, 1,015	595, 790, 1,020, 2,350, 2,300	975, 1,270 (Lumen Select, Dedicated)
CONTROL	Field SeleCCT Color Temp Switch	3 CCT 27/30/3500K 30/40/5000K, Dedicated: 3000K	5 CCT 27/30/35/40/5000K	5 CCT 27/30/35/40/5000K	5 CCT w/ D2W D2W/27/30/35/40/5000K
	Dimming Phase Cut (LE/TE) / 0-10V	10% Phase Cut	5% Phase Cut	5% Phase Cut, 0-10V ²	5% Phase Cut
	Estimated Life Hours	35K	50K	50K	50K
	Input Voltage	120V	120V	120V, 120-277V	120V, 120-277V
ACCESSORIES	Fits Mounting Frame	✓	✓	✓	✓
	Decorative Overlays ³	✓	✓	✓	✓ ¹
	Slide-in-Side™ Wire Traps ⁴		✓	✓	✓
	Mounting Bar	✓ ⁵	✓	✓	✓

¹ Round and Round-to-Square Designer Overlay Trims sold separately. ² HLBs are also available in QuickLink Low Voltage (Phase Cut or 0-10V) or Smart Wi-Fi Connected by WiZ Pro versions. ³ Matte Black, Tuscan Bronze, Satin Nickel, Paintable Matte White. ⁴ Slide-N-Side wire traps eliminate the need to use knockouts in most instances. Pre-wire outside of the j-box, fold down the tab(s), and insert non-metallic sheathed cable into the Slide-N-Side strain relief. ⁵ Mounting Bars are included with HLBSL but are sold separately for the HLBE Bulk Packs (HLBEMOUNT-12PK).

HLBC Slim Regressed Series
CANLESS DOWNLIGHT

- Standard HLBC is canless with dedicated lumens while the HLBC-LS features Lumen Select and 2-in-1 installation for fast Canless-to-Can conversion!
- Regressed baffle die-cast aluminum trim and prismatic lens improve visual comfort
- 6-Position Switch: 5 Color Field-Selectable in 27/30/35/40/5000K + Dim-to-Warm (3000K dims to 1800K)
- LED downlight with remote driver/junction box
- 5% Dimming (Phase Cut or 0-10V), 50K hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HLBC4069FSD2W1EMW	4" Downlight, Canless Only	White	60W	2700K-5000K+D2W	120V	675	8	080083263059	2406524
HLBC4LS9FSD2W1EMWR	4" Downlight, 2-in-1 Install	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 600-900	13	080083263097	Pending
HLBC4LS9FSD2W1EMWR-CA	4" Downlight, 2-in-1 Install, CA T20	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 600-900	13	080083267927	Pending
HLBC4LS9FSD2WE010MWR	4" Downlight, 2-in-1 Install	White	60-70W	2700K-5000K+D2W	120-277V	Lumen Select 600-900	13	080083263233	Pending
HLBC4LS9FSD2WE010MWR-CA	4" Downlight, 2-in-1 Install, CA T20	White	60-70W	2700K-5000K+D2W	120-277V	Lumen Select 600-900	13	080083267965	Pending
HLBC6099FSD2W1EMW	6" Downlight, Canless Only	White	70W	2700K-5000K+D2W	120V	1,010	12	080083263073	Pending
HLBC6LS9FSD2W1EMWR	6" Downlight, 2-in-1 Install	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 900-1,200	16	080083263219	Pending
HLBC6LS9FSD2W1EMWR-CA	6" Downlight, 2-in-1 Install, CA T20	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 900-1,200	16	080083267941	Pending
HLBC6LS9FSD2WE010MWR	6" Downlight, 2-in-1 Install	White	60-70W	2700K-5000K+D2W	120-277V	Lumen Select 900-1,200	16	080083263257	Pending
HLBC6LS9FSD2WE010MWR-CA	6" Downlight, 2-in-1 Install, CA T20	White	60-70W	2700K-5000K+D2W	120-277V	Lumen Select 900-1,200	16	080083267989	Pending

HLB & HLBPH Slim
CANLESS DOWNLIGHT

- An ultra-thin flange and sleek downlight design that fits under any obstruction
- Two Versions: HLB-Die-cast aluminum with low-glare prismatic lens OR HLBPH-Dead-front plastic frame with smooth lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED downlight with remote driver/junction box
- 5% Dimming (Phase Cut or 0-10V), 50K hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HLB3059FS1EMWR	3" Downlight, Round	White	40W	2700K-5000K	120V	575	9	080083151301	2370657
HLB3059FS1EMWR	3" Downlight, Square	White	40W	2700K-5000K	120V	595	9	080083151325	N/A
HLB4SP069FS1EMWR	4" Downlight, Square	White	65W	2700K-5000K	120V	650	10	080083909667	2347583
HLB4069FS1EMWR	4" Downlight, Round	White	65W	2700K-5000K	120V	790	12	080083848140	2322243
HLB6099FS1EMWR	6" Downlight, Round	White	70W	2700K-5000K	120V	1,020	16	080083848164	2322242
HLB6S099FS1EMWR	6" Downlight, Square	White	70W	2700K-5000K	120V	975	12	080083863389	2331663
HLB8169FS1EMWR	8" Downlight, Round	White	90W	2700K-5000K	120V	1,760	21	080083150601	2358047
HLB4069FSE010MWR	4" Downlight, Round (0-10V)	White	65W	2700K-5000K	120-277V	790	11	080083912261	2351376
HLB4S069FSE010MWR	4" Downlight, Square (0-10V)	White	65W	2700K-5000K	120-277V	725	11	080083912308	N/A
HLB6099FSE010MWR	6" Downlight, Round (0-10V)	White	70W	2700K-5000K	120-277V	1,060	15	080083912285	2351377
HLB6S099FSE010MWR	6" Downlight, Square (0-10V)	White	70W	2700K-5000K	120-277V	975	15	080083912322	N/A
HLB8LS9FSE010MWR	8" Downlight, Round (0-10V)	White	90-150W	2700K-5000K	120-277V	Lumen Select 1,400-2,400	31	080083083367	2358045
HLB12LS9FSE010MWR	12" Downlight, Round (0-10V)	White	90-150W	2700K-5000K	120- 277V	Lumen Select 1,300-2,300	32	080083088782	N/A
HLBPH4069FS1EMWR	4" Downlight, Round	White	65W	2700K-5000K	120V	805	10	080083190003	2385132
HLBPH6099FS1EMWR	6" Downlight, Round	White	70W	2700K-5000K	120V	1,015	14	080083190027	2385133

HLBSL & HLBE Slim Lite
CANLESS DOWNLIGHT

- Offers simplified features for budget-conscious installers
- 3 Color Field-Selectable in 27/30/3500K or 30/40/5000K; dedicated 3000K
- Only available in HALO's dead-front plastic frame and smooth lens
- LED downlight and remote driver/junction box with mounting bar*
- 10% Phase Cut (LE/TE) Dimming, 35,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HLBSL4069FS231EMWR	4" Downlight	White	65W	2700K-3500K	120V	753	10	080083912346	2349484
HLBSL4069FS351EMWR	4" Downlight	White	65W	3000K-5000K	120V	735	10	080083916368	2349485
HLBSL6099FS231EMWR	6" Downlight	White	70W	2700K-3500K	120V	955	13	080083912360	2349475, 2349476, 2349477
HLBSL6099FS351EMWR	6" Downlight	White	70W	3000K-5000K	120V	950	13	080083916382	2349478, 2349479, 2349480
HLBE4069301EMWR-12PK*	4" Downlight (12-Pack)	White	65W	3000K	120V	740	10	080083265503	2405484
HLBE4069301EMWR-24PK*	4" Downlight (24-Pack)	White	65W	3000K	120V	740	10	080083265527	2405484
HLBE6099301EMWR-12PK*	6" Downlight (12-Pack)	White	70W	3000K	120V	1,025	13	080083265541	2405486
HLBE6099301EMWR-24PK*	6" Downlight (24-Pack)	White	70W	3000K	120V	1,025	13	080083265565	2405486

*HLBE: mounting bar 12 packs sold separately

HALO CANLESS DOWNLIGHT PRODUCT SELECTION GUIDE



		LT-DM	CJB	RL-DM & RL-DM Night Light	HLA	RA-DM	RL-Slope	LCR
FEATURES / PERFORMANCE	Fixture Types	Downlights	Slim Downlight with Attached J-box/Driver + 2-in-1 Canless-to-Can Versions Available	Downlights & Downlight + Night Light	Gimbal Adjustables (30° Tilt/360° Rotation)	Gimbal Adjustables (35° Tilt/360° Rotation)	Regressed Slope Adjustable (9-45° Tilt)	Downlights, Wall Wash, DL + Emergency Battery Backup
	Sizes (Round)	3", 4", 6"	4", 6"	4", 6"	3", 4"	4", 6"	4", 6"	2", 4", 6", 8"
	Trim & Lens	Baffle or Smooth w/Flat Lens	Single Step Regressed w/ Flat smooth Lens	Baffle w/Curved Lens (NL has Transparent Trim)	Low-glare Prismatic or Smooth Lens	Baffle w/Flat Lens	Baffle w/Integrated Optic	Smooth w/Flat Lens
	Max Lumens (By size @ 3000K)	570, 645, 785	745, 920	955, 1,300 (Lumen Select, Dedicated) (NL: 780, 1,020)	710	790, 775	960, 1,630	835, 1,295, 3,100, 8,155
	Field SeleCCT Color Temp Switch	3 CCT 27/30/3500K, 30/40/5000K, Dedicated: 3000K	5 CCT 27/30/35/40/5000K	5 CCT w/ D2W D2W/27/30/35/40 5000K (NL: 2000K)	5 CCT 27/30/35/40/5000K	5 CCT w/ D2W D2W/27/30/35/40 5000K	5 CCT 27/30/35 40/5000K	6 CCT 27/30/35/40 50/6500K

CONTROL	Dimming Phase Cut (LE/TE)/0-10V	10% Phase Cut ¹	10% Phase Cut ¹	5% Phase Cut, 0-10V ² (NL: 5% Phase Cut-both zones)	5% Phase Cut	5% Phase Cut	5% Phase Cut	5% Dual-Dim (Phase Cut + 0-10V)
	Estimated Life Hours	35K	35K	70K (NL: 50K)	50K	50K	50K	50K
	Input Voltage	120V	120V	120V (NL: 120V)	120V	120V	120V	120-277V

HARDWARE	Fits Mounting Frames	✓	✓	✓	✓	✓	✓	✓
	Decorative Overlays ³			✓ (RL-DM only)				✓
	Slide-in-Side™ Wire Traps ⁴			✓	✓	✓	✓	✓
	Mounting Bar	✓		✓	✓	✓	✓	✓

¹ LT-DMs are also available in QuickLink Low Voltage (Phase Cut) versions.
² RL-DMs are also available in QuickLink Low Voltage (0-10V) versions.
³ Matte Black, Tuscan Bronze, Satin Nickel, Paintable Matte White.
⁴ Slide-N-Side wire traps eliminate the need to remove knockouts. Pre-wire outside of the j-box, fold down the tab, and insert non-metallic sheathed cable into the Slide-N-Side strain relief.

RL-DM Recessed Baffle Trim CANLESS DOWNLIGHT

- The perfect balance of value and visual comfort, now available as a canless direct mount
- Die-cast aluminum baffle trim with curved lens and selectable lumen option
- 6-Position Switch: 5 Color Field-Selectable in 27/30/35/40/5000K + Dim-to-Warm (3000K dims to 1800K)
- LED downlight with remote driver/junction box
- 5% Phase Cut (LE/TE) Dimming, 70,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RL4LS9FSD2W1EWHDM	4" Baffle Downlight	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 600-900	11	080083258901	2403141
RL6069FSD2W1EWHDM	6" Baffle Downlight	White	60W	2700K-5000K+D2W	120V	750	7	080083258963	2402947
RL6LS9FSD2W1EWHDM	6" Baffle Downlight	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 900-1,200	14	080083258987	2403144

LT-DM Recessed Baffle & Smooth Splay Trim CANLESS DOWNLIGHT

- Closely mirrors the RL-DM design, but offers simplified features for maximum savings
- Dead front plastic trim in either baffle or smooth splay with flat lens
- 3 Color Field-Selectable in 27/30/3500K or 30/40/5000K; dedicated in 3000K
- LED downlight with remote driver/junction box
- 10% Phase Cut (LE/TE) Dimming, 35,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LT3059FS231EWHDMR	3" Smooth Splay Downlight	White	60W	2700K-5000K	120V	550	7	080083159680	N/A
LT3059FS351EWHDMR	3" Smooth Splay Downlight	White	60W	3000K-5000K	120V	570	7	080083159628	N/A
LTB4069FS351EWHDMR	4" Baffle Downlight	White	60W	3000K-5000K	120V	625	8	080083253456	N/A
LT4069FS231EWHDMR	4" Smooth Splay Downlight	White	60W	2700K-5000K	120V	620	7	080083159925	2374009
LT4069FS351EWHDMR	4" Smooth Splay Downlight	White	60W	3000K-5000K	120V	645	7	080083159642	2374012
LTB6089FS351EWHDMR	6" Baffle Downlight	White	65W	3000K-5000K	120V	745	9	080083253470	N/A
LT6089FS231EWHDMR	6" Smooth Splay Downlight	White	65W	2700K-5000K	120V	765	8	080083159963	2374019
LT6089FS351EWHDMR	6" Smooth Splay Downlight	White	65W	3000K-5000K	120V	785	9	080083159666	2374021

RLS Slope Recessed Baffle
CANLESS DOWNLIGHT

- Tilt the adjustment mechanism from 9° to 45° to match ceiling pitches from 2/12 to 12/12
- Better lighting and improved visual comfort with its integrated optic and regressed light engine
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED downlight with remote driver/junction box
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RLS4099FS1EWHDMR	4" Slope Ceiling Recessed Downlight	White	70W	2700K-5000K	120V	960	9	080083282975	2382794
RLS6159FS1EWHDMR	6" Slope Ceiling Recessed Downlight	White	100W	2700K-5000K	120V	1,630	9	080083282999	2382795

RA-DM Baffle Trim Gimbal
CANLESS DOWNLIGHT

- Aim lighting where you want it with 360° of rotations and tilts 35°
- Regressed Baffle trim for increased cutoff
- 6-Position Switch: 5-Color Field-Selectable (27/30/35/40/5000K) + Dim-to-Warm (3000K dims to 1800K)
- LED downlight with remote driver/junction box and mounting hardware included
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
RA4LS9FSD2W1EWHDM	4" Adjustable Baffle Downlight	White	65W	2700K-5000K + D2W	120V	600-900	9	080083283019	2351865
RA6LS9FSD2W1EWHDM	6" Adjustable Baffle Downlight	White	65W	2700K-5000K + D2W	120V	600-900	9	080083283033	2351876

HLA Adjustable Gimbal
CANLESS DOWNLIGHT

- Aim lighting where you want it with 360° of rotations and tilts 30°
- Ideal for shallow plenum spaces - requires only 1-1/2" above the ceiling
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED downlight with remote driver/junction box
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HLA406FL9FS1EMWR	4" Adjustable Direct Mount	White	60W	2700K-5000K	120V	710	11	080083882960	2341271
HLA406VWFL9FS1EMWR	4" Adjustable Direct Mount	White	60W	2700K-5000K	120V	710	11	080083863600	2333844



RL Night Light
CANLESS & RECESSED DOWNLIGHTS

- Two Modes: Downlight for general illumination and Night Light for gentle glow (2000K)
- Dead front plastic trim with baffle trim and flat lens
- 6-Position Switch, 5 Color Field-Selectable in 27/30/35/40/5000K + Dim-to-Warm (3000K dims to 1800K), Night Light CCT: Warm glow 2000K
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Canless LED Downlights with remote/driver/junction box

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RLNL4079FSD2W1EWHDM	4" Night Light	White	60W	2700K-5000K+D2W	120V	780	9	080083265039	2403400
RLNL6109FSD2W1EWHDM	6" Night Light	White	60W	2700K-5000K+D2W	120V	1,020	12	080083265053	2403403

Recessed LED Trims with E26 medium socket adapter, and mounting hardware (4"-friction blades and 5/6"-torsion springs & friction blades)

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RLNL4079FSD2W1EWH	4" Night Light	White	65W	2700K-5000K+D2W	120V	775	8	080083268047	2409525
RLNL56109FSD2W1EWH	6" Night Light	White	75W	2700K-5000K+D2W	120V	1,065	11	080083268061	2409524

HALO CANLESS LOW VOLTAGE DOWNLIGHTING

Installing downlights has never been faster.

Power multiple fixtures on the single power supply for easy and efficient lighting installation.

SAVE UP TO 85% WIRING TIME

QuickLink Low Voltage System



HLB QuickLink Low Voltage (Phase Cut Dimming) CANLESS DOWNLIGHT

- Fixtures twist-connect to low voltage cable, powered by a remote driver/junction box
- Die-cast aluminum with low-glare prismatic lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- (1) 72W remote power supply & 35-ft of low voltage cable + (4) downlights included



Catalog Number	Description	Max Fixtures	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts Per	UPC	Energy Star ID
HLBQL4069FS1E-4PK	Kit: (1) Remote Power Supply & 35-ft of cable + (4) 4" HLBQL Fixtures	7	White	60W	2700K-5000K	Driver: 120V Lights: QL LowV	640	8	080083190102	2388203
HLBQL6099FS1E-4PK	Kit: (1) Remote Power Supply & 35-ft of cable + (4) 6" HLBQL Fixtures	6	White	60W	2700K-5000K	Driver: 120V Lights: QL LowV	975	12	080083190126	2388204
HLBQL4069FS1E	(1) 4" HLBQL Fixture*	-	White	60W	2700K-5000K	QL Low Voltage	600	8	080083190188	N/A
HLBQL6099FS1E	(1) 6" HLBQL Fixture*	-	White	60W	2700K-5000K	QL Low Voltage	975	12	080083190218	N/A

*Driver not included. Only compatible with the HALO QuickLink 120V phase cut system.

LT QuickLink Low Voltage (Phase Cut Dimming) RECESSED SMOOTH SPLAY TRIM CANLESS DOWNLIGHT

- Fixtures twist-connect to low voltage cable, powered by a remote driver/junction box
- Dead front plastic trim in either baffle or smooth splay and flat lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- (1) 72W remote power supply & 35-ft of low voltage cable + (4) downlights included



Catalog Number	Description	Max Fixtures	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts Per	UPC	Energy Star ID
LTQL4069S1EDM-4PK	Kit: (1) Remote Power Supply & 35-ft of cable + (4) 4" LTQL Fixtures	8	White	60W	2700K-5000K	Driver: 120V Lights: QL LowV	675	8	080083190140	2388205
LTQL6069S1EDM-4PK	Kit: (1) Remote Power Supply & 35-ft of cable + (4) 6" LTQL Fixtures	8	White	60W	2700K-5000K	Driver: 120V Lights: QL LowV	825	8	080083190164	2388206
LTQL4069S1EDM	(1) 4" LTQL Fixture*	-	White	60W	2700K-5000K	QL Low Voltage	675	8	080083190232	N/A
LTQL6069S1EDM	(1) 6" LTQL Fixture*	-	White	60W	2700K-5000K	QL Low Voltage	825	8	080083190256	N/A

*Driver not included. Only compatible with the HALO QuickLink 120V phase cut system.

HALO CANLESS LOW VOLTAGE DOWNLIGHTING

HALO canless commercial downlights with a 120-277V remote driver/ junction box positioned as HALO's light commercial solution for new construction and remodel applications.



HLB QuickLink Low Voltage (0-10V Dimming) SLIM CANLESS DOWNLIGHT

- Fixtures twist-connect to low voltage cable, powered by a remote driver/junction box
- Die-cast aluminum with low-glare prismatic lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- (1) 90W remote power supply & 40-ft of low voltage cable + (6) downlights included



Catalog Number	Description	Max Fixtures	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts Per	UPC	Energy Star ID
HLBQL4069FSE010-6PK	Kit: (1) Remote Power Supply & 40-ft of cable + (6) 4" HLBQL Fixtures	11	White	60W	2700K-5000K	Driver: 120-277V Lights: QL LowV	605	8	080083182206	2388712
HLBQL6099FSE010-6PK	Kit: (1) Remote Power Supply & 40-ft of cable + (6) 6" HLBQL Fixtures	7	White	60W	2700K-5000K	Driver: 120-277V Lights: QL LowV	935	12	080083182220	2388713
HLBQL4069FSE010	(1) 4" HLBQL Fixture* (Commercial)	-	White	60W	2700K-5000K	QL Low Voltage	605	8	080083182367	N/A
HLBQL6099FSE010	(1) 6" HLBQL Fixture* (Commercial)	-	White	60W	2700K-5000K	QL Low Voltage	935	12	080083182381	N/A

*Driver not included. Only compatible with the HALO QuickLink 120-277V system.

RL QuickLink Low Voltage (0-10V Dimming) RECESSED BAFFLE TRIM CANLESS DOWNLIGHT

- Fixtures twist-connect to low voltage cable, powered by a remote driver/junction box
- Die-cast aluminum baffle trim and curved lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- (1) 90W remote power supply & 50-ft of low voltage cable + (8) downlights included



Catalog Number	Description	Max Fixtures	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts Per	UPC	Energy Star ID
RLQL4069SE010DM-8PK	Kit: (1) Remote Power Supply & 50-ft of cable + (8) 4" RLQL Fixtures (Commercial)	13	White	60W	2700K-5000K	Driver: 120-277V Lights: QL LowV	620	7	080083182282	2388378
RLQL6069SE010DM-8PK	Kit: (1) Remote Power Supply & 50-ft of cable + (8) 6" RLQL Fixtures (Commercial)	13	White	60W	2700K-5000K	Driver: 120-277V Lights: QL LowV	665	7	080083182305	2388389
RLQL4069SE010DM	(1) 4" RLQL Fixture* Commercial	-	White	60W	2700K-5000K	QL Low Voltage	620	7	080083182442	N/A
RLQL6069SE010DM	(1) 6" RLQL Fixture* Commercial	-	White	60W	2700K-5000K	QL Low Voltage	665	7	080083182466	N/A

*Driver not included. Only compatible with the HALO QuickLink 120-277V system.

HALO CANLESS DOWNLIGHTING

LCR Light Commercial Series
CANLESS DOWNLIGHT

- Redesigned with dual-dimming, additional CCT selectability and lumen packages, designer trims color options and new wall wash or emergency battery backup versions
- Die-cast aluminum smooth splay trim and flat lens (downlight and wall wash versions)
- 6 Color Field-Selectable in 27/30/35/40/50/6500K
- LED downlight with remote driver/junction box
- 5% Dual Dim: 0-10V or Phase Cut (LE/TE), 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LCR208RD9FSE020	2" Downlight	White	70W	2700K-6500K	120-277V	835	10	080083259144	2405806
LCR408RD9FSE020	4" Downlight	White	70W	2700K-6500K	120-277V	890	11	080083261505	2405430
LCR412RD9FSE020	4" Downlight	White	75W	2700K-6500K	120-277V	1,295	14	080083261567	2405436
LCR615RD9FSE020	6" Downlight	White	75W	2700K-6500K	120-277V	1,610	18	080083261628	2405442
LCR621RD9FSE020	6" Downlight	White	150W	2700K-6500K	120-277V	2,100	23	080083261680	2405603
LCR630RD9FSE010	6" Downlight	White	150W	2700K-6500K	120-277V	3,100	30	080083261741	2405609
LCR810RD9FSE020	8" Downlight	White	75W	2700K-6500K	120-277V	1,090	12	080083261789	2405807
LCR830RD9FSE010	8" Downlight	White	150W	2700K-6500K	120-277V	3,150	35	080083261826	2405809
LCR850RD9FSE010	8" Downlight	White	150W	2700K-6500K	120-277V	5,180	55	080083261864	2405810
LCR880RD9FSE010	8" Downlight	White	200W	2700K-6500K	120-277V	8,155	92	080083261901	2405812

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LCR408WW9FSE020	4" Wall Wash (Damp-listed)h	White	70W	2700K-6500K	120-277V	835	10	080083259182	2405431
LCR412WW9FSE020	4" Wall Wash (Damp-listed)	White	75W	2700K-6500K	120-277V	1,255	14	080083261543	2405437
LCR615WW9FSE020	6" Wall Wash (Damp-listed)	White	75W	2700K-6500K	120-277V	1,520	18	080083261604	2405598
LCR621WW9FSE020	6" Wall Wash (Damp-listed)	White	150W	2700K-6500K	120-277V	2,125	23	080083261666	2405601
LCR630WW9FSE010	6" Wall Wash (Damp-listed)	White	150W	2700K-6500K	120-277V	2,970	32	080083261727	2405611

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LCR408RD9FSE040	4" Downlight + Emergency Batt.	White	70W	2700K-6500K	120-277V	890	10.7	080083259168	2405429
LCR412RD9FSE040	4" Downlight + Emergency Batt.	White	75W	2700K-6500K	120-277V	1,295	14.4	080083261529	2405434
LCR615RD9FSE040	6" Downlight + Emergency Batt.	White	75W	2700K-6500K	120-277V	1,610	17.5	080083261581	2405442
LCR621RD9FSE040	6" Downlight + Emergency Batt.	White	150W	2700K-6500K	120-277V	2,100	23	080083261642	2405601
LCR630RD9FSE040	6" Downlight + Emergency Batt.	White	150W	2700K-6500K	120-277V	3,100	31.6	080083261703	2405607
LCR810RD9FSE040	8" Downlight + Emergency Batt.	White	75W	2700K-6500K	120-277V	1,090	12	080083261765	2405800
LCR830RD9FSE040	8" Downlight + Emergency Batt.	White	150W	2700K-6500K	120-277V	3,150	33	080083261802	2405809
LCR850RD9FSE040	8" Downlight + Emergency Batt.	White	150W	2700K-6500K	120-277V	5,180	50	080083261840	2405802
LCR880RD9FSE040	8" Downlight + Emergency Batt.	White	200W	2700K-6500K	120-277V	8,155	92	080083261888	2405812

HALO CANLESS DOWNLIGHTING

CJB Integrated JBox
CANLESS DOWNLIGHT

- Slim design 4" and 6" LED recessed downlights for easy installation from below the ceiling
- 2-in-1 installation for either canless or LED trim retrofit
- 4" delivers 600 lumens; 6" delivers 900 lumens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- 10% Phase Cut Dimming (LE/TE), 35K hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
CJB4069FS1EMW	4" Downlight, Canless Only	White	40W	2700K-5000K	120V	600	8	080083266234	2508445
CJB6099FS1EMW	6" Downlight, Canless Only	White	60W	2700K-5000K	120V	900	9	080083266258	2508446
CJB4069FS1EMWR	4" Downlight, 2-in-1 Install	White	40W	2700K-5000K	120V	600	8	080083266470	Pending
CJB6099FS1EMWR	6" Downlight, 2-in-1 Install	White	60W	2700K-5000K	120V	900	9	080083266494	Pending
CJB4069FS1EMW-6PK	4" Downlight (6-Pack), Canless Only	White	40W	2700K-5000K	120V	600	8	080083266272	2508445
CJB6099FS1EMW-6PK	6" Downlight (6-Pack), Canless Only	White	60W	2700K-5000K	120V	900	9	080083266296	2508446
CJB4069FS1EMWR-6PK	4" Downlight, 2-in-1 Install (6-Pack)	White	40W	2700K-5000K	120V	600	8	080083266517	Pending
CJB6099FS1EMWR-6PK	6" Downlight, 2-in-1 Install (6-Pack)	White	60W	2700K-5000K	120V	900	9	080083266531	Pending
CJB4069FS1EMW-12PK	4" Downlight (12-Pack), Canless Only	White	40W	2700K-5000K	120V	600	8	080083266418	2508445
CJB6099FS1EMW-12PK	6" Downlight (12-Pack), Canless Only	White	60W	2700K-5000K	120V	900	9	080083266432	2508446
CJB4069FS1EMWR-12P	4" Downlight, 2-in-1 Install (12-Pack)	White	40W	2700K-6500K	120V	600	8	080083266555	Pending
CJB6099FS1EMWR-12P	6" Downlight, 2-in-1 Install (12-Pack)	White	60W	2700K-6500K	120V	900	9	080083266579	Pending

HALO®

Remodel Solutions

Go Faster!

with HALO Canless EZ-Trim

1

FASTER INSTALLATION
Lower installation costs than the traditional HALO remodeling housing

2

FEWER COMPONENTS
Easier ordering and less boxes than the traditional HALO remodeling housing

3

COMPLETE SELECTION
3, 4, 6-inch and shallow options

[Click to watch installation video](#)

EZ-Trim
CANLESS DOWNLIGHT




Catalog Number	Description	Finish	Lamp Base	UPC
CEZ4125GU10WBICAT	4" Canless EZ-Trim	White	GU10	080083175536
CEZ4125E26WBICAT	4" Canless EZ-Trim	White	E26	080083175550
CEZ6125E26WBICAT	6" Canless EZ-Trim	White	E26	080083176212
CEZ6125GU24WBICAT	6" Canless EZ-Trim	White	GU24	080083175574
CEZ6126E26WBICAT	6" Canless EZ-Trim, Shallow	White	E26	080083176236
CEZ6126GU24WBICAT	6" Canless EZ-Trim, Shallow	White	GU24	080083175598

HALO®

Maximum energy savings with easy installation

- Compatible with most recessed housings and sizes
- Suitable for new construction and remodel
- Replaces traditional incandescent lighting

Quick and Easy Installation

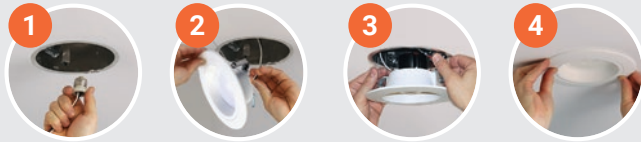

HALO RECESSED LED TRIM PRODUCT SELECTION GUIDE



		LT	LA	RL	RL Night Light	RA	RSQ
FEATURES / PERFORMANCE	LED Trim Type	Downlights	Gimbal Adjustables (35° Tilt/360° Rotation)	Downlights	Downlights	Gimbal Adjustables (35° Tilt/360° Rotation)	Square Downlights
	Size & Shape	4", 5/6" Round	4", 5/6" Round	3", 4", 5/6" Round	4", 5/6" Round	4", 5/6" Round	4", 5", 6" Square
	Trim & Lens	Baffle or Smooth w/ Flat Lens	Baffle w/ Flat Lens	Baffle w/ Curved Lens	Baffle w/ Curved Lens + Transparent Trim	Baffle w/ Flat Lens	Baffle w/ Flat Lens
	Max Lumens (By size @ 3000K)	570, 645, 785	955, 1,300 (Lumen Select, Dedicated)	780, 1,020	775, 1,065	710	790, 775
	Field SeleCCT Color Temp Switch	5 CCT 27/30/35/40/5000K 3 CCT 27/30/3500K or 30/40/50K Dedicated: 3000K	Dedicated 3000K	5 CCT w/ D2W D2W 27/30/35/40 5000K	5 CCT w/ D2W D2W/27/30/35 40/5000K + Night Light (2000K)	5 CCT w/ D2W D2W 27/30/35/40 5000K	5 CCT 27/30/35 40/5000K

CONTROL	Dimming Phase Cut (LE/TE)	10%	10%	5% ¹	5% (Both Zones)	5%	5%
	Estimated Life Hours	50K	35K	70K	50K	50K	50K
	Input Voltage	120V	120V	120V	120V	120V	120V

HARDWARE	Decorative Overlays ²			✓			✓
-----------------	----------------------------------	--	--	---	--	--	---

¹ RL LED Trims are also available in Smart Wi-Fi Connected by WIZ Pro versions

² Matte Black, Tuscan Bronze, Satin Nickel, Paintable Matte White

HALO RECESSED LED TRIMS

RL Recessed Baffle

LED TRIMS

- Delivers long life, exceptional performance, and installs into almost any recessed housing
- The die-cast aluminum baffle trim reduces glare and provides a traditional downlight appearance
- 6-Position Switch: 5 Color Field-Selectable in 27/30/35/40/5000K + Dim-to-Warm (3000K dims to 1800K)
- Includes LED Trim, E26 medium socket adapter and mounting hardware (3" & 4"-friction blades and 5/6"-torsion springs & friction blades)
- 5% Phase Cut (LE/TE) Dimming, 70,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RL3059FSD2W1EWH	3" Baffle Trim	White	60W	2700K-5000K+D2W	120V	610	8	080083257669	2402944
RL4LS9FSD2W1EWH	4" Baffle Trim	White	60-70W	2700K-5000K+D2W	120V	Lumen Select 600-900	9	080083257683	2402940
RL56069FSD2W1EWH	5/6" Baffle Trim	White	60W	2700K-5000K+D2W	120V	700	8	080083818525	2356074
RL56LS9FSD2W1EWH	5/6" Baffle Trim	White	60-75W	2700K-5000K+D2W	120V	Lumen Select 900-1,200	12	080083818549	2354587

LT Recessed Baffle or Smooth Splay

- The LT LED trims offer a cost-saving alternative to the RL Series that retrofit into recessed housings
- Dead-front plastic fixture with either baffle or smooth splay trims and smooth flat lens
- Available in 3 or 5 Color Field-Selectable or Dedicated 3000K
- Includes E26 medium socket adapter and mounting hardware (4"-friction blades; 5/6"-torsion springs only fit housings with spring receivers)
- 10% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Selectable 5-CCT

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LT4069FS1EWHR	4" Baffle Trim	White	60W	2700K-5000K	120V	680	7	080083283965	2508121
LT4099FS1EWHR	4" Baffle Trim	White	60W	2700K-5000K	120V	1030	9	080083284009	2508243
LT56079FS1EWHR	5/6" Baffle Trim	White	60W	2700K-5000K	120V	805	7	080083284047	2508127
LT56129FS1EWHR	5/6" Baffle Trim	White	75W	2700K-5000K	120V	1345	12	080083284085	2508244

Dedicated CCT & Lumens

Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LT460WH6930R	4" Baffle Trim	White	60W	3000K	120V	620	8	080083746163	2309297
LT460WH6930R-CA	4" Baffle Trim, CA T20	White	60W	3000K	120V	665	7	080083900893	2257770, 2277227
LT560WH6930R	5/6" Baffle Trim	White	60W	3000K	120V	750	10	080083746187	2309300
LT560WH6930R-CA	5/6" Baffle Trim, CA T20	White	60W	3000K	120V	745	8	080083900954	2252183, 2277232

HALO RECESSED LED TRIMS

RA Baffle Adjustable Gimbal

CANLESS ADJUSTABLE

- Adjustable retrofit with 360° of rotation and 35° tilt
- Regressed die-cast aluminum baffle trim reduces glare and improves cutoff
- 6-Position Switch: 5-Color Field-Selectable (27/30/35/40/5000K) + Dim-to-Warm (3000K dims to 1800K)
- Adjustable LED Trim, E26 medium socket adapter, and mounting hardware included
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
RA4LS9FSD2W1EWH	4" Adjustable Gimbal Trim	White	60W	2700K-5000K + D2W	120V	600-900	9	080083282975	2567964
RA56LS9FSD2W1EWH	5/6" Adjustable Gimbal Trim	White	60W	2700K-5000K + D2W	120V	600-900	9	080083282999	2567965



LA Baffle Adjustable Gimbal

CANLESS ADJUSTABLE

- Adjustable retrofit with 360° of rotation and 35° tilt
- Regressed dead front plastic baffle trim for increased cutoff and maximum adjustability
- Available in dedicated 3000K only
- Adjustable LED Trim, E26 medium socket adapter, and mounting hardware included
- 10% Phase Cut (LE/TE) Dimming, 35,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
LA4069301EWH	4" Adjustable Gimbal Trim	White	60W	3000K	120V	610	9	080083818143	2325616
LA56069301EWH	5/6" Adjustable Gimbal Trim	White	60W	3000K	120V	635	9	080083818242	2325606



RSQ Square Recessed Baffle

TRIMS

- Provides integrated LED trims with a square baffle trim and lens
- Features die-cast aluminum square baffle trim and flat lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- Adjustable LED Trim, E26 medium socket adapter, and mounting hardware included
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RSQ4089FS1EMWWB	4" Square Baffle Trim	White	65W	2700K-5000K	120V	830	10	080083824496	2333094
RSQ5089FS1EMWWB	5" Square Baffle Trim	White	70W	2700K-5000K	120V	830	10	080083824595	2333267
RSQ6089FS1EMWWB	6" Square Baffle Trim	White	70W	2700K-5000K	120V	860	10	080083824694	2333093



HALO HOUSINGS

HALO Housing Contractor Packs

HALO Housing Contractor Pack quantities are quick, convenient and easy to order.

E Series Housings

Compact and efficient housings for new or retrofit residential or light commercial construction.

- Ideal for residential and light commercial applications
- Compatible with Recessed LED Trims or E26 socket-based lamps
- Optimized and listed for EISA compliant tungsten-halogen lamps along with incandescent, CFL, and LED lamps with E26 bases
- For installation in insulated (IC) and non-IC rated ceilings
- Available in 120V or 120-277V configurations



Catalog Number*	Description	Socket	Voltage	Qty Per Single Catalog Number	Qty of Cartons	UPC
E4ICATSB-60	4" IC, Shallow, New Construction	E26	120V	60 Housings	10 cartons	080083253968
E5ICATNB-60	5" IC, Air-Tite, New Construction, No Socket Bracket	E26	120V	60 Housings	10 cartons	080083254071
E27ICAT-60	6", IC, Shallow, New Construction	E26	120V	60 Housings	10 cartons	080083254064
E750ICAT-60	6" IC, Air-Tite, LED New Construction	LED Quick Connect (No Socket)	120-277V	60 Housings	10 cartons	080083254033
E7ICAT-60	6" IC, Air-Tite, New Construction	E26	120V	60 Housings	10 cartons	080083253944
E7ICATNB-60	6" IC, Air-Tite, New Construction, No Socket Bracket	E26	120V	60 Housings	10 cartons	080083253951
E7RICAT-60	6" IC, Air-Tite, Remodel	E26	120V	60 Housings	10 cartons	080083254019

*Only order 1 unit for catalog numbers above. Each catalog number represents 60 housings.

H Series Housings

The industry standard recessed housing for commercial and residential applications.

- Ideal for commercial and residential applications
- Compatible with Recessed LED Trims or E26 socket-based lamps
- Optimized and listed for EISA compliant tungsten-halogen lamps along with incandescent, CFL, and LED lamps with E26 bases
- For installation in insulated (IC) and non-IC rated ceilings
- Available in 120V or 120-277V configurations



Catalog Number*	Description	Socket	Voltage	Qty Per Single Catalog Number	Qty of Cartons	UPC
H245ICAT-60	4" New Construction Ultra Shallow	LED Quick Connect (No Socket)	120-277V	60 Housings	10 cartons	080083253982
H245RICAT-60	4" Remodel Ultra Shallow	LED Quick Connect (No Socket)	120-277V	60 Housings	10 cartons	080083254057
H995ICAT-60	4" New Construction, IC Air-Tite, Shallow	LED Quick Connect (No Socket)	120-277V	60 Housings	10 cartons	080083254040
H99ICAT-60	4" New Construction, IC Air-Tite, Shallow	E26	120V	60 Housings	10 cartons	080083254002
H750ICAT-60	6" New Construction, IC Air-Tite	LED Quick Connect (No Socket)	120-277V	60 Housings	10 cartons	080083254026
H7ICAT-60	6" New Construction, IC Air-Tite	E26	120V	60 Housings	10 cartons	080083253975
H7ICATNB-60	6" New Construction, IC Air-Tite, No Socket Bracket	E26	120V	60 Housings	10 cartons	080083253999
H7ICT-60	6" New Construction, IC	E26	120V	60 Housings	10 cartons	080083254088

*Only order 1 unit for catalog numbers above. Each catalog number represents 60 housings.

HALO TRADITIONAL TRIMS

Traditional Recessed Trims

4", 5" AND 6"

- Traditional recessed trims install into recessed housings, are offered in a variety of styles, and accept different lamp types
- Trims shape light to minimize glare and reduce ceiling brightness
- Open trims focus the downlighting beam to provide uniform distribution
- Can be used in new construction or remodel housings



Catalog Number	Description	Finish	Lamp Source	UPC
4001WB	4" Step Baffle - Plastic	White	Halogen, INC, LED, CFL	080083745869
993W	4" Coilex Baffle	White	Halogen, INC, LED, CFL	080083628483
5001P	5" Metal Splay Baffle	White	Halogen, INC, LED, CFL	662400602729
5125WB	5" Full Cone Baffle	White	Halogen, INC, LED, CFL	080083743162
300P	6" Open - Socket Supporting	White	Halogen, INC, LED, CFL	662400302421
30WAT	6" Air-Tite Baffle	White	Halogen, INC, LED, CFL	662400603320
310W	6" Coilex Baffle	White	Halogen, INC, LED, CFL	080083515882
456W	6" Baffle for Slope Ceiling	White	Halogen, INC, LED, CFL	662400676287
6100WB	6" Tapered Metal Baffle, 2-Rings Narrow & Wide	White	Halogen, INC, LED, CFL	080083743452
6125WB	6" Full Cone Baffle	White	Halogen, INC, LED, CFL	080083754465



HALO UNDER CABINET


Sleek and Seamless

This low-profile design remains invisible to the eye while providing uniform illumination on the task. With maximum energy savings and contractor friendly installation features, the HU11 series is ideal for commercial and residential projects.



HU11 LED Under Cabinet

Selectable CCT

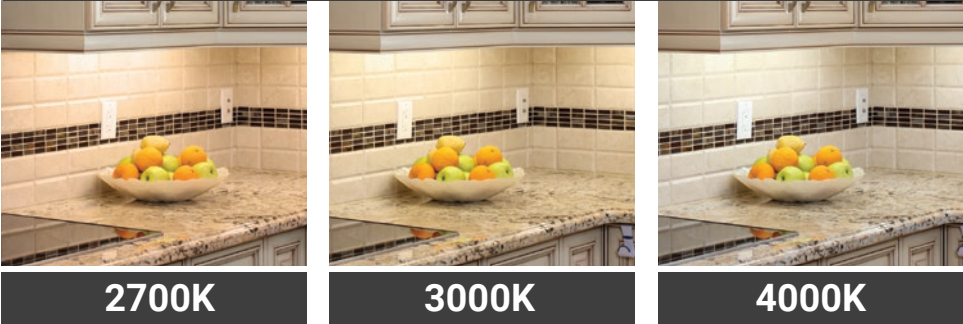


With a simple slide of the SeleCCTable color temperature switch, users have the flexibility to choose between 2700K, 3000K and 4000K CCT to customize the color temperature to suit their specific lighting need.

HU11 Under Cabinet


9", 18", 24" AND 36"

- Sleek, low-profile LED under cabinet with less than 1" profile
- 3 Color Field-Selectable options 2700K/3000K/4000K
- 5% Phase Cut (LE/TE) Dimming, 90+ CRI

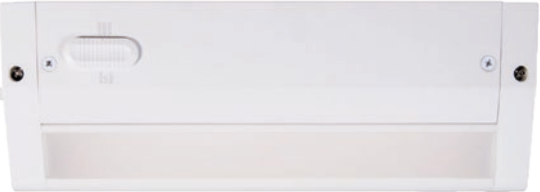

Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HU1109D9SP	9" Under Cabinet	White	17W INC	2700K-4000K	120V	300	5	080083875788	2341224
HU1118D9SP	18" Under Cabinet	White	33W INC	2700K-4000K	120V	560	8	080083875863	2341217
HU1124D9SP	24" Under Cabinet	White	44W INC	2700K-4000K	120V	785	11	080083875948	2341218
HU1136D9SP	36" Under Cabinet	White	56W INC	2700K-4000K	120V	1,125	16	080083876020	2341219

Live Smarter in Full Color

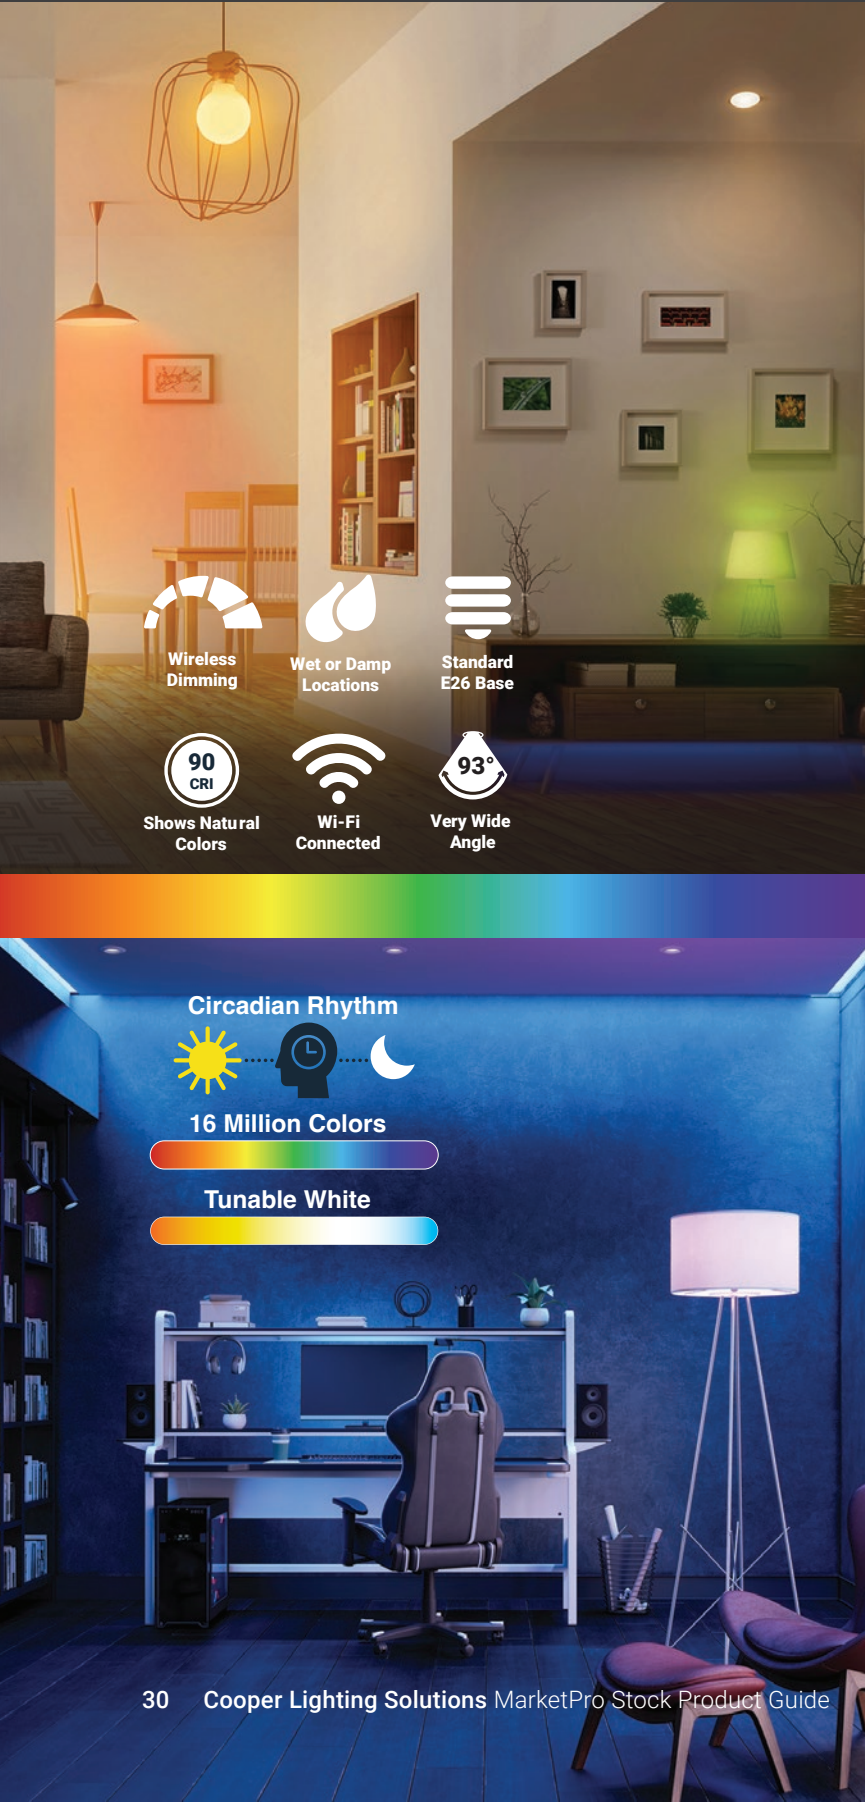

HALO is now available with WiZ Pro!

Illuminate spaces with the perfect lighting. Set the mood with 16 million colors + white tuning using the WiZ App or preferred compatible voice assistant.

WiZ Pro also provides features and tools installers need to setup and manage multiple projects with speed and efficiency.



DIY SETUP

Anyone can claim and control lights over Wi-Fi using the WiZ App.



PRO SETUP

The WiZ Pro Setup App allows installers to do pre-Wi-Fi claiming, manage multiple projects and access the WiZ Pro Dashboard for more advanced features.



WIZclick FEATURE

Toggle your switch to change between 2 scenes

Integrations



HALO | WiZ PRO

RL Smart Wi-Fi Recessed Baffle LED TRIM (CONNECTED BY WIZ PRO)

- Set up from the WiZ app to wirelessly control lighting temperature, color, dimming and scenes along with home automation
- Fixtures provide 16 million colors and tunable white light from 2200-6500K
- LED downlight with remote driver/junction box and mounting hardware included
- Wi-Fi Control and Dimming to 5% via WiZ App, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
RL4069WZRGBWWHR	4" Smart Wi-Fi Baffle Trim (WiZ Pro)	White	Full Color & Tunable White (2200-6500K)	120V	615	8	080083256167	Pending
RL56069WZRGBWWHR	5/6" Smart Wi-Fi Baffle Trim (WiZ Pro)	White	Full Color & Tunable White (2200-6500K)	120V	690	8	080083256143	Pending

HLB Smart Wi-Fi Slim CANLESS LED DOWNLIGHTS (CONNECTED BY WIZ PRO)

- Set up from the WiZ app to wirelessly control lighting temperature, color, dimming and scenes along with home automation
- Fixtures provide 16 million colors and tunable white light from 2200-6500K
- LED downlight with remote driver/junction box and mounting hardware included
- Wi-Fi Control and Dimming to 5% via WiZ App, 50,000 hrs, 90+ CRI



Catalog Number	Description	Finish	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HLB4069WZRGBWMWR	4" Smart Wi-Fi Downlight (WiZ Pro)	White	Full Color & Tunable White (2200-6500K)	120V	600	9	080083255955	2408244
HLB6099WZRGBWMWR	6" Smart Wi-Fi Downlight (WiZ Pro)	White	Full Color & Tunable White (2200-6500K)	120V	960	12	080083255931	2408245

ESF Smart Wi-Fi Floodlight OUTDOOR SECURITY (CONNECTED BY WIZ PRO)

- Set up from the WiZ app to wirelessly control lighting temperature, color, dimming and scenes along with home automation
- Fixtures provide 16 million colors and tunable white light from 2200-6500K
- LED floodlight with minimal design, perfect for security and ambiance outdoors
- WiFi Control and Dimming via WiZ app, 50,000 hrs, wet location rated, up to 2000 lumens



Catalog Number	Description	Finish	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
ESF2ARGBWFB-WiZ	4" Smart Wi-Fi Baffle Trim (WiZ Pro)	Black	Full Color & Tunable White (2200-6500K)	120V	2200	28	080083260300	Pending
ESF2ARGBWFW-WiZ	5/6" Smart Wi-Fi Baffle Trim (WiZ Pro)	White	Full Color & Tunable White (2200-6500K)	120V	2200	28	080083260324	Pending



PR Series
Downlights
p. 33-35



HC Series
Downlights
p. 33-35

HALO[®]

COMMERCIAL

LED DOWNLIGHTS

Commercial LED Lighting provides the right balance of visual comfort and energy efficiency, with proven and tested products that always meet commercial code and never break the budget.

HALO COMMERCIAL DOWNLIGHTING

PR4 SeleCCTable™ Series DOWNLIGHT

- 4-inch LED self-flanged, lensed recessed downlight
- Available in new construction and retrofit
- Field-Selectable lumens: 1,000, 1,500, 2,000
- 3 Color Selectable in 30/35/4000K; 80 CRI
- Exclusive medium / wide beam distribution reversible flip lens



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
PR4FS12D010	4" Housing	Raw Finish	18W-32W CFL	N/A	120-277V	1,000-2,000	20	080083131839	2353549
PR4M12MD8FSMW	4" LED Module	Matte White	18W-32W CFL	3000K-4000K	120-277V	1,000-2,000	N/A	080083060795	2353549
PR4RFS12D010	4" Retrofit Kit	Raw Finish	18W-32W CFL	N/A	120-277V	1,000-2,000	22	080083132683	2353549

Complete downlight includes housing or retrofit kit + LED Module.

PR6 SeleCCTable™ Series DOWNLIGHT

- 6-inch LED self-flanged, lensed recessed downlight
- Available in new construction and retrofit
- Field selectable lumens: 1,000, 1,500, 2,000
- 3 Color Selectable in 30/35/4000K; 80 CRI
- Medium / wide beam distribution lens options included



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
PR6FS12D010	6" Housing	Raw Finish	18W-32W CFL	N/A	120/277V	1,000-2,000	21	080083892174	2328770
PR6M12MD8FSMW	6" LED Module	Matte White	18W-32W CFL	3000K-4000K	N/A	1,000-2,000	N/A	080083891122	2345484
PR6RFS12D010	6" Retrofit Kit	Raw Finish	18W-32W CFL	N/A	120V-277V	1,000-2,000	22	080083891726	2345457, 2345484

Complete downlight includes housing or retrofit kit + LED Module.

PR8 SeleCCTable™ Series DOWNLIGHT

- 8-inch LED self-flanged, lensed recessed downlight
- Available in new construction and retrofit
- 3 Color Selectable in 30/35/4000K; 80 CRI
- Universal input 120V-277V with 0-10V 1% dimming
- Medium and wide interchangeable lens options



Catalog Number	Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
PR820D010	8" Housing	Raw Finish	18W-32W CFL	3000K-4000K	120-277V	2,000	22	080083771769	2289673
PR8M12MDMW	8" LED Module	Matte Finish	18W-32W CFL	3000K-4000K	120-277V	1,000-2,000	N/A	080083772926	2289581
PR8R20D010	8" Retrofit Kit	Raw Finish	18W-32W CFL	3000K-4000K	120-277V	2,000	22	080083772179	2289681

Complete downlight includes housing or retrofit kit + LED Module.

HC4 Downlight Series
DOWNLIGHT

- 4-inch LED self-flanged, deep regressed lens downlight
- New construction boat-shaped frame converts to remodeler
- Lumens: 1,000, 1,500, 2,000
- Color temperature: 3500K; 80 CRI
- Medium distribution reflector



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HC410D010	4" Housing	Raw Finish	75W INC, 18-26W CFL	N/A	120-227V	1,000	10.1W at 120V, 10.9W at 277V	080083860586	2331377
HC415D010	4" Housing	Raw Finish	100W INC, 26-32W CFL	N/A	120-277V	1,500	14.2W at 120V, 14.9W at 277V	080083860609	2340373
HC420D010	4" Housing	Raw Finish	150W INC, 32W-42W CFL	N/A	120-227V	2,000	21.1W at 120V, 21.4W at 277 V	080083860623	2331586
HM40525835	4" LED Module	White	N/A	3500K	120-227V	500-2,500	N/A	080083213948	N/A
41MDH	4" Reflector	Semi-Specular Clear (Haze)	N/A	N/A	N/A	N/A	N/A	080083850181	N/A

Complete downlight includes: Housing + LED Module + Reflector.

HC6 Downlight Series
DOWNLIGHT

- 6-inch LED self-flanged, deep regressed lens downlight
- New construction boat-shaped frame converts to remodeler
- Lumens: 1,000, 1,500, 2,000
- Color temperature: 3500K; 80 CRI
- Medium distribution reflector



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HC610D010	6" Housing	Raw Finish	75W INC, 18-26W CFL	N/A	120-227V	1,000	10.W at 120V, 10.9W at 277V	080083883646	2340539
HC615D010	6" Housing	Raw Finish	100W INC, 26-32W CFL	N/A	120-227V	1,500	14.2W at 120V, 14.9W at 277V	080083883660	2340646
HC620D010	6" Housing	Raw Finish	150W INC, 32W-42W CFL	N/A	120-227V	2,000	21.1W at 120V, 21.4W at 277V	080083883684	2340647
HM60525835	6" LED Module	White	N/A	3500K	120-227V	500-2,500	N/A	080083214662	N/A
61MDH	6" Reflector	Semi-Specular Clear (Haze)	N/A	N/A	N/A	N/A	N/A	080083850983	N/A

Complete downlight includes: Housing + LED Module + Reflector.

HC8 Downlight Series
DOWNLIGHT

- 8-inch LED self-flanged, deep regressed lens downlight
- New construction boat-shaped frame converts to remodeler
- Lumens: 1,000, 1,500, 2,000
- Color temperature: 3500K; 80 CRI
- Medium distribution reflector



Catalog Number	Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
HC810D010	8" Housing	Raw Finish	75W INC, 18-26W CFL	N/A	120-227V	1,000	10.W at 120V, 10.9W at 277V	080083216062	2470933
HC815D010	8" Housing	Raw Finish	100W INC, 26-32W CFL	N/A	120-227V	1,500	14.2W at 120V, 14.9W at 277V	080083907861	2351453
HC820D010	8" Housing	Raw Finish	150W INC, 32W-42W CFL	N/A	120-227V	2,000	21.1W at 120V, 21.4W at 277V	080083907908	2351457
HM80520835	8" LED Module	White	N/A	3500K	120-227V	500-2,000	N/A	080083216468	2351454
81MDH	8" Reflector	Semi-Specular Clear (Haze)	N/A	N/A	N/A	N/A	N/A	080083909902	N/A

Complete downlight includes: Housing + LED Module + Reflector.

